

EFB-36-2/A

H.264 2MP IP Bullet Camera

POWER, VIDEO and DATA OVER COAX




CMOS Sensor Night Vision Cloud Service Mobile View Email Alert Weather - Proof

Features

- Megapixel progressive CMOS image sensor
- H.264 dual-stream encoding, 25 fps
- PoC & EoC enabled, One BNC connect interface
- Streams power & data over coax for 300m (1000ft)
- Day/Night, D-WDR, 3DNR, AWB, AGC, BLC
- 36pcs IR LEDs support 30m(98ft) IR range
- IP67 Weatherproof Housing

Dimensions

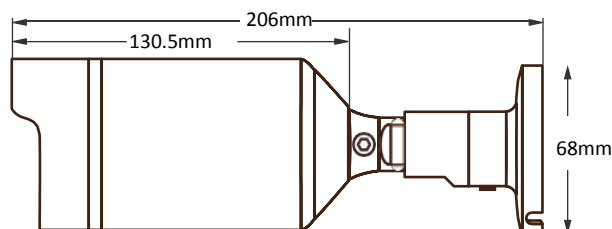

Specification

CAMERA	
Sensor	1/2.7" CMOS
Day/Night	Auto-controlled by ICR
Min. illumin.	0.1 lux @ F1.2, AGC on, 0 lux with IR on
Lens	3.6mm Fixed Lens
IR LED	36 LEDs
IR Range	30m (98ft)
VIDEO	
Compression	H.264, Support Dual-stream
Main Stream	1080P
Sub Stream	D1 (704x576)
Frame Rate	25fps
Shutter	1/50(1/60)s to 1/10,000s
Function	2D/3D-NR, D-WDR
NETWORK	
Interface	75ohm BNC Port (Ethernet over Coax)
Cable Type	75ohm Coaxial Cable (RG-59/ RG-6/ RG-11)
Data Range	over 1000m (3,280ft)
Protocol	RTSP/ FTP/ PPPOE/ DHCP/ DDNS/ NTP/ UPnP
Compliance	ONVIF
Mobile phone	iPhone, iPad, Android Phone/Tablet
ELECTRICAL	
Interface	75ohm BNC Port (Power over Coax)
Cable Type	75ohm Coaxial Cable (RG-59/ RG-6/ RG-11)
Power Range	over 300m(1,000ft)
Input Voltage	DC48V
PoC Output	DC12V
Consumption	<12W
GENERAL	
Housing	Metal, IP 67
Operating conditions	20°C ~ +60°C / Less than 95% RH
Dimension	206 mm x 130.5mm x 68 mm
Net weight	0.65kgs
Gross weight	0.75kgs

EFB-36-4/B & 5/B

H.265 4 & 5MP IP Bullet Camera

POWER, VIDEO and DATA OVER COAX




CMOS Sensor Night Vision Cloud Service Mobile View Email Alert Weather - Proof

Features

- Megapixel progressive CMOS image sensor
- H.265 dual-stream encoding, 25 fps
- PoC & EoC enabled, One BNC connect interface
- Streams power & data over coax for 300m (1000ft)
- Day/Night, D-WDR, 3DNR, AWB, AGC, BLC
- 36pcs IR LEDs support 30m(98ft) IR range
- IP67 Weatherproof Housing

Dimensions

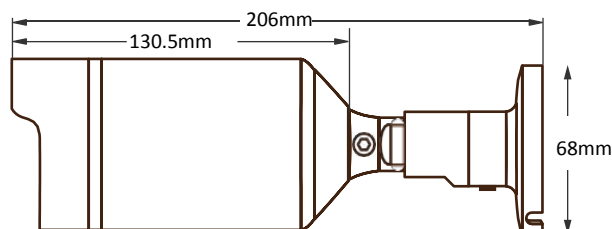

Specification

CAMERA		
Model No.	EFB-36-4/B	EFB-36-5/B
Sensor	1/3.2" CMOS	1/1.8" CMOS
Day/Night	Auto - controlled by ICR	
Min. illumin.	0.01Lux @ F1.2(Color) / 0.001Lux @ F1.2(B/W)	
Lens	3.6mm Fixed Lens	
IR LED	36 LEDs	
IR Range	30m (98ft)	
VIDEO		
Compression	H.265 / H.264, Support Dual-stream	
Main Stream	4MP (2560×1440)	5MP (2592×1920)
Sub Stream	D1 (704×576)	D1 (704×576)
Frame Rate	25fps	25fps
Shutter	1/50(1/60)s to 1/10,000s	
Function	2D/3D-NR, D - WDR	
NETWORK		
Interface	75ohm BNC Port (Ethernet over Coax)	
Cable Type	75ohm Coaxial Cable (RG-59/ RG-6/ RG-11)	
Data Range	over 1000m (3,280ft)	
Protocol	RTSP/ FTP/ PPPOE/ DHCP/ DDNS/ NTP/ UPnP	
Compliance	ONVIF	
Mobile phone	iPhone, iPad, Android Phone/Tablet	
ELECTRICAL		
Interface	75ohm BNC Port (Power over Coax)	
Cable Type	75ohm Coaxial Cable (RG-59/ RG-6/ RG-11)	
Power Range	over 300m(1,000ft)	
Input Voltage	DC48V	
PoC Output	DC12V	
Consumption	<12W	
GENERAL		
Housing	Metal, IP 67	
Operating conditions	-20°C ~ +60°C / Less than 95% RH	
Dimension	206 mm x 130.5mm x 68mm	
Net weight	0.65kgs	
Gross weight	0.75kgs	